




# TRANSFER OIL

Pure Fluid Attitude



## 205 - 4+2SW - HELIX

Thermoplastic multispiral hose for UHP water based applications from 1200 to 1400 bar (from 17400 to 20000 psi)

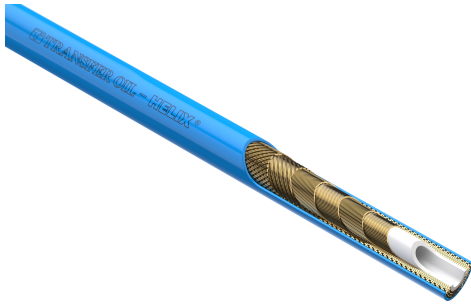

### FEATURES

#### Inner Tube

Polyamide (PA)

#### Reinforcement

Two open spiral layers + Four closed spiral layers of steel wire

#### Cover

Polyurethane (PUR), non pinpricked, laser branding

#### Industrial Applications

Waterjet cutting // Tube cleaning // Surface preparation and paint removal // Hydro demolition // Ships, tanks and vessel cleaning // Waterblast supply hose // General industrial cleaning // Removal of accumulated dirt from surfaces.

#### Hydraulic Applications

Hydraulic jacks // Bolt tensioning // Testing applications // General UHP hydraulic applications

#### Temperature Range

-30°C to 70°C (-22°F to 158°F)

#### Features

Ultra high working pressure // Excellent chemical resistance // Resistance to ozone, ultraviolet light and aging // High resistance against abrasion // Low volumetric expansion at maximum working pressure // Resistant to sea water // High impulse resistance // Long length capability // Excellent cut and crush resistance

#### Description

Ultra High Pressure hose utilising high tensile steel wire applied in counter rotating multiple spiral layers. Tube and cover of engineering polymer with intermediate adhesion layers.

**Available As Factory Made Assemblies: Please Contact Our Sales Office For Further Details.**

#### Standard Branding

**TRANSFER OIL - HELIX®** - TO UHP - Part No - 4+2SW - Inch Size - DN Size - WP bar / psi - MADE IN ITALY - [www.transferoil.com](http://www.transferoil.com) - QQ/YY - Batch No

Part no.	DN	Inches	Dash	ID (mm)	OD (mm)	WP (bar)	BP (bar)	ID (inch)	OD (inch)	WP (psi)	BP (psi)	SF	BR (mm)	BR (inch)	Weight (gr/m)	Weight (lb/ft)	Ferrule standard	Ferrule A316L
2055	DN12	1/2	-8	12.8	24.3	1400	3500	0.504	0.957	20000	50000	2.5:1	110	4.33	1121	0.753	HAG151	
2057	DN20	3/4	-12	18.8	32.6	1200	3000	0.740	1.283	17400	43500	2.5:1	170	6.69	1858	1.249	HAG171	

#### WJTA-IMCA Color Coding Scheme for Pressure Hoses - Maximum Working Pressure Applicable

10,000 PSI / 690 bar 15,000 PSI / 1034 Bar 20,000 PSI / 1379 Bar 30,000 PSI / 2068 Bar 40,000 PSI / 2758 Bar 55,000 PSI / 3792 Bar

\* The safety factor between the burst pressure and working pressure depend on the application requirements. Four to one (4:1) safety factor should be used in dynamic impulsing hydraulic applications.

\*\* The maximum WORKING PRESSURE of an assembly is given by the component having the lowest working pressure. This means that if the working pressure of a fitting is lower than the working pressure of the hose, the WORKING PRESSURE of the fitting

becomes the WORKING PRESSURE of the entire assembly.

The maximum WORKING PRESSURE of the assembly can be found marked on each sleeve of the assembly and on the pressure test report.

---

## AVAILABLE INSERTS

---

Part	Dash	Inch	DN	F-BSPP	F-DKOS	F-JIC	F-TYPE	M-HP	M-MP	M-NPT
2055	-8	1/2	DN12	HBG	HDG	HEG	HFG	HMG	HLG	HIG
2057	-12	3/4	DN20	HBG	HDE	HEG	HFD		HLE	HIG

---

*Dimensions and values shown may be changed without prior notice to improve product performances and reliability.*

*Transfer Oil S.p.A. assumes no liability on mistakes nor errors appearing in this spec sheet.*

*Document date: 13/05/2026*

*[www.transferoil.com](http://www.transferoil.com)*